




Diaphragm type DP Gauge 400 DGC

- **AP Range : 0 to 25 up to 600 mm H₂O**
- **0 to 1 up to 25 inch H₂O**

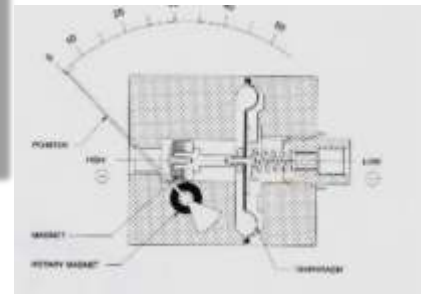

Specifications

Accuracy	:	±2% of the FSD (Ascending)
Migraton	:	No migraton: Zero leakage from high to low port
Range	:	0-25 to 0-600 mm H ₂ O or similar ranges in other units
First marking on the scale	:	15% of the FSD
Sensing element	:	Diaphragm
Wetedparts	:	Diaphragm, body material, SS 302 spring & ceramic magnet
Case material	:	Stainless steel (SS 304)
Dial size in inch /mm	:	3.5", 4", 4.5", 6" / 80, 100, 115, 150 mm
Mountng	:	Direct, front flange, 2" pipe & surface mounng
Maximum working pressure	:	35 bar/ 500 psi
Maximum process temperature	:	80°C/ 175° F
Body material	:	Aluminum & SS 316
Seals	:	Buna-N, Viton, EPDM diaphragm & 'O' rings
Window	:	Float glass (Std.), toughened glass, acrylic & safety glass
Connecton	:	1/4" NPT(F) Std. Optional 1/4" BSP(F) with adaptor
Portng	:	In-line, rear, bott m, bbotm & vent, in-line & vent, in-line & botom
Over range protecti n	:	Up to the max. Working pressure from high side
Protecton for gauge & switch	:	IP 65/ NEMA-4

Option Switches (Adjustable in 40-100% of FSD)

Liquid Filling	:	1 or 2 SPSTs with a DIN plug
Red follower pointer (except 6")	:	1 SPDT with DIN plug
Customer Logo	:	
Dual Scale	:	
Color Brand	:	



Combination



Gauge



Switch



Gauge + Switch (With DIN plug)

Mounting Bac ets




Gauge



**Gauge + Switch
(With DIN plug)**



Gauge Wall Mounting

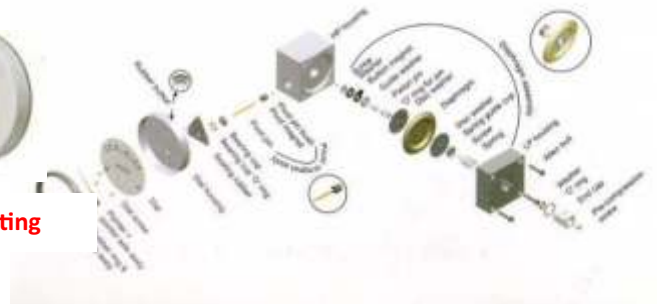

Authorised Dealer



NK Instruments Pot. Ltd.

B-501/504, 5th floor, Raunak Arcade, Near THC Hospital, Gokhale Road, Naupada,
Thane(W) 400602. Maharashtra INDIA Telefax Nos.: 91-22-25301330 / 31 / 32
E-Mail: sales@nkstruments.com Web: <http://www.nkstruments.com>
Skype: nitinkelkarskype Gtalk: nkstruments2006

